

MISTRAL->

The most versatile intelligent and connected sorting machine for waste recovery.



Unmatched performances

FLOW

DETECTION: a unique design, by Pellenc ST

- New multi-stream spectrometer
- + Focused light for a more accurate signal
- → Complete coverage of NIR/VIS spectra with a unique spectrometer
- → Optimised Electronic for a **better signal/noise ratio**

High capacity sorting recognized on the market

- + Turbosorter 3rd generation: 2D Objects stabilisation
- + Top Speed 2nd generation: + 50% capacity with iso performance

4.0 Industry & Services

Sensors to enhance customer relationship

Increased availability

- + Conveyor performance analysis
- → Alert to prevent outputbox jams
- * **Assistance** in the prevention and prediction of conveyor equipment breakage

Performance Optimization

- + Stream composition **monitoring & alerts**
- + Stream distribution monitoring
- → Belt cleanness monitoring

Customer **Support**

- → One year service included
- **Maintenance & Expertise** visits
- + Hotline **24/7**

Future Proof

- + **Upgradability** Guarantee
- + Compatibility of all **new sensors (Al, Watermarking, IoT,...)** as upgrades

Full Package: a complete system



- A unique TÜV certified solution
- Designed for simple integration
- Easy and secure machine access

Low maintenance cost

- Retractable platforms for easy maintenance
- Low replacement rate of wearing parts (electrovalves, lamps)
- Economical Vortex cooling system (no air conditioning)

SMART &SHARE

24/7 Customer Service

- A turnkey offer, including wear parts
- Local & personalised support
- · Connected machines: Smart&Share





Configurations

800-1200-1600-2000-2400-2800

Widths (mm)

Materials

PET, PE, PP, paper, wood, domestic waste, organic, RDF...











Multi-channel management

Available data

- **→** Sorting data available locally
- → Communication Protocols: Modbus, Profinet & OPCUA ready




Remote maintenance access



MARKE Connectivity Smart&Share

Easy, quick & safe maintenance

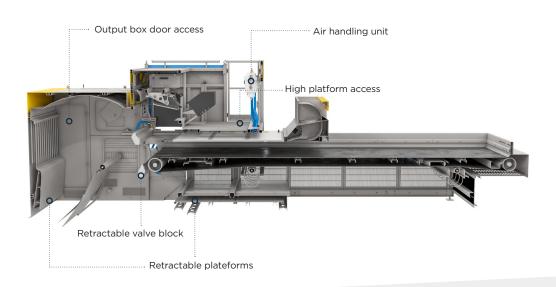









Valve blocks



Standard: 25mm HR High Resolution 12,5mm





HP High Power : 25mm **SP** Super Power 12,5mm



Robustness

- → Working temperature: -10°C- +55°C
- → IP 65
- + Touchscreen



Black and inert sorting Secure & cost-effective technology



Better sorting flexibility +50% capacity at iso performance



High quality & sorting speed Robustness: no wearing parts, MTBF>20 000h

Very low energy consumption Simple integration







